



Network Camera & PTZ Quick Start Guide

Version 1.1.0
JF TECH(Co.,Ltd)

1 Welcome

Thank you for purchasing our Network camera!

This manual applies to JF IP cameras and only for simple operation instructions; you can get more information through the CD in the box. If you have any needs, please don't hesitate to contact us.

Please keep this user's manual well for future reference!

2 Network config

In order to make the camera get access to the network smoothly, please make sure IPC share the same network segment with the router, conform to the router's IP and it is a useable IP address according to the actual network environment.

2.1 Modify IP Address

Default IP Address	192.168.1.10
Default Subnet Mask	255.255.255.0
Default Gateway	192.168.1.1

In this chapter, it will only introduce the modifying IP address via "DeviceManage" way.

Step 1: Download product CD, double click DeviceManage.exe to install and open it.

Step 2: Click IP search, all online IP address of the monitoring devices within the LAN will be searched and displayed. See Figure 2.1 for more details.



Figure 2. 1

No.	Function
1	Search Button
2	Detail Display
3	Modify Window


Step 3: Click one IP address, modify it on the right and click "Modify" to save.

3 IE Access

Step 1: Open IE and input the modified camera IP address in the address bar.

Step 2: Install plug-in. IE is default to intercept plug-in. Please set IE security level. Go to [internet options]—[security]—[Customized level]—[ActiveX], enable them all. Or go to our official website to download and install plug-ins (<http://www.jftech.com>). Or get it from the CD and install IE plug-in.exe.

Step 3: The login interface is shown as below, please input your user name and password (Default user name is admin and password is null). Change the administrator password timely after login.

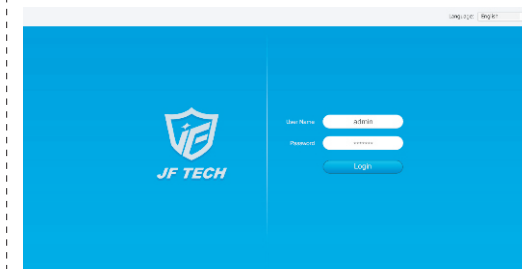

Step 4: Click "login". See Figure 3 for more details.

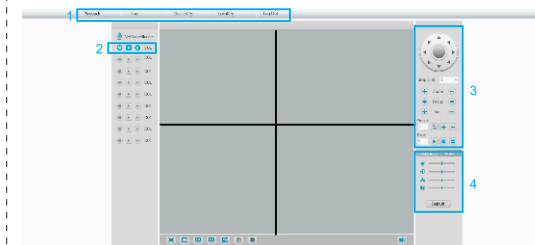


Figure 3

NO.	Function
1	Main Menu
2	Stream Selection
3	PTZ Control Menu
4	Image Settings

3.1 Main Menu Operation


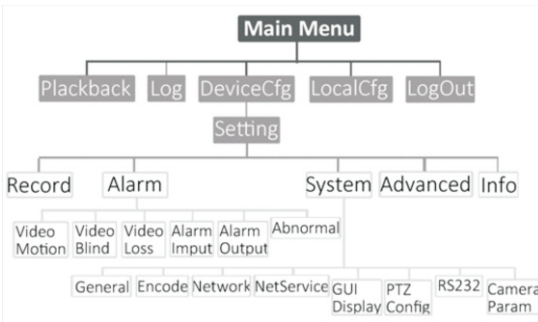


Figure 3.1 (goods in kind prevail)

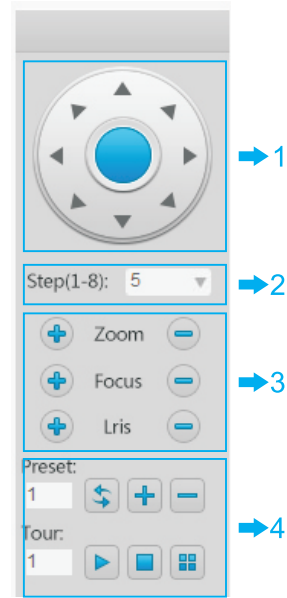

Note:

This quick start guide is for reference only. Slight difference may be found in the user interface.

All the designs and software here are subject to change without prior written notice.

All trademarks and registered trademarks mentioned are the properties of their respective owners.

If there is any uncertainty or controversy, please refer to the final explanation of us.

Please visit our website or contact your local retailer for more information.

3.1.1 Playback

You can download local or remote video playback by file name or by time.

3.1.2 Log

You can see alarm log and operate log here.

3.1.3 DeviceCfg

You can modify device's configuration here. See more details in Figure 3.1.

3.1.4 LocalCfg

You can change the save path of videos and pictures here.

3.1.5 LogOut

You can exit here.

3.2 StreamSelection Operation

You can choose main stream or extra stream to connect preview screen here.

3.3 PTZ Control Menu Operation

3.3.1 Direction Control

3.3.2 Set Running Speed

3.3.3	Zoom	+	amplification
		-	narrow
	Focus	+	focus near
		-	focus far
	Iris	+	get brighter
		-	get darker

3.3.4 You can set, call, add and delete preset and tour here.

3.4 Image Settings

You can change picture color here and reboot your camera.